
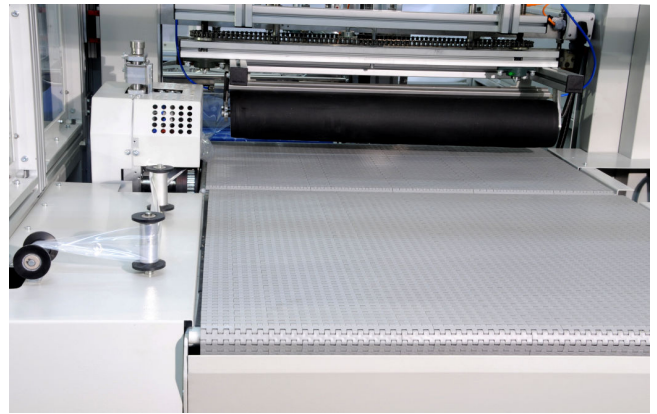


# IMPACT 100 SERVO SERIES Fully Automated Continuous Sealing Packaging Machine: (page1 / 2)

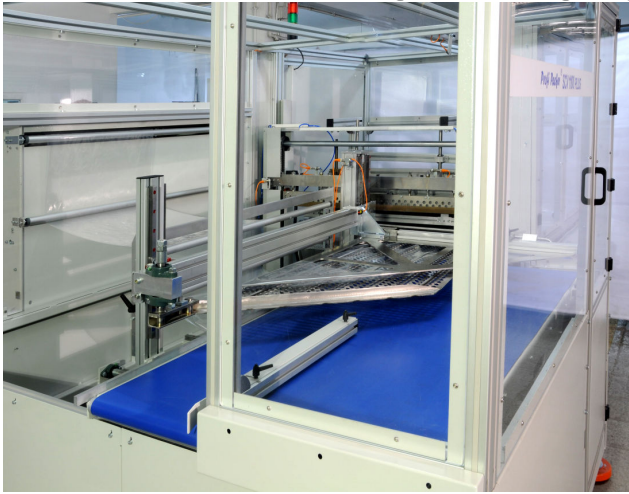

Models	Cross sealer width mm/inches	Min. Packg. Width	Max. Packg. Width	Max. Film Width	Machine weight		Power supply	Consumption (Max/Average)	Air supply (per cycle)	Max. Capacity Linear speed	Maximum Jaw height	Machine Dimensions mm/inches	Packed dimensions mm/inches
					Net	Crated							
<b>IMPACT PLUS 100-SERVO</b> Code : Y12 009 0144	1120mm / 44,1"	400mm / 15,7"	950mm / 37,4"	1150mm / 45,2"	920 kg / 2024 lbs	1250 kg / 2750 lbs	400V, 8 Amps 3 Ph	5,5 kW / 2,5 kW	6 Bar / 1,2dm <sup>3</sup> / 73in <sup>3</sup>	30 mt/min without sealing interruptions	230mm 9" (optional higher)	A: 1000 / 39,3" B: 2413 / 95" C: 3078 / 121" D: 855 / 34" E: 1480 / 58"	W: 2510 / 97" L: 3180 / 110" H: 1640 / 65"
* Color : Metallic dark gray (RAL code : custom color)													
Warranty: One year on non-wearable parts													

## Features:

- High speed automation in the packaging large products without any operator
- Continuous sealing feature
- Packaging advantage without any length limit
- Applicable films POF (7-37μ) or PE (20-70μ)
- Servo motor driven cross seal, high precision with cross seal
- The latest Delta (Optional Siemens) electronic environment
- Linking conveyor belt with automatic extracting function over seal jaw

## IMPACK 100 SERVO Continuous Sealing Packaging Machine: (page2 / 2)

- Trim winder with tension control
- Cross sealer with constant hot knife
- Automatic package length scanning
- Height adjustable cross sealer
- Consistency in packaging quality
- Integrated automatic external infeed belt control option
- Easy change over between different product sizes
- Automatic film dispenser with tension control
- Automatic stop against misfed packages
- Photocell controlled package infeed
- Touch screen control panel
- User friendly PLC software and touch operator panel
- Leading and the trailing edge distance control
- Automatic length detection option
- Vertical photocell option to detect thin packages
- Center seal option with continuous & cross sealer mechanism
- Motorized adjustment of film forming shoulder height
- Motorized continuous sealing and center seal adjustment
- Motorized front conveyor adjustment
- ISO 9001 quality standard with the relevant norm's confirmations
- Festo Pneumatics, Moeller, Siemens electric components
- CE marking
- Manufacturer's guarantee for spare part stock and after sales support,
- One year warranty on non-wearable parts
- Color: Metallic dark gray (RAL code: custom color)

